


Installation Instructions

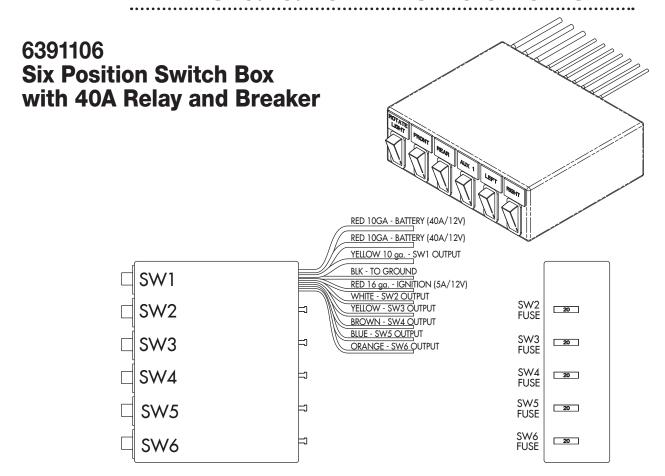

General Instructions

The **6391106** switch box contains 6 switched circuits. SW1 is isolated by a 40A relay and protected by a 40A breaker. When SW1 is activated, the relay will energize. SW2/SW3/SW4/SW5/SW6 are all directly switched and each protected by a 20A fuse on the rear of the box.

All switch labels will be illuminated when ignition is on.

Installation

- **1.** Determine mounting location keeping in mind air bag deployment zone and other obstructions.
- 2. Mount using hardware supplied.
- 3. Connect BLACK 16 ga. wire to CHASSIS GROUND
- 4. Connect RED 16 ga. wire to a 5A/12V POWER
- **5.** Connect both RED 10 ga. wires direct to BATTERY (40A/12V each)

6. Connect all switch outputs as desired. Unused switch outputs should be taped off and secured.

Warrantv

Buyers Products Co. warrants all truck/trailer hardware manufactured or distributed by it, to be free from defects in material and workmanship for a period of one year from date of shipment. Parts must be properly installed and used under normal conditions. Any product which has been altered, including modification, misuse, accident or lack of maintenance will not be considered under warranty. Normal wear is excluded. The sole responsibility of Buyers Products Co. under this warranty is limited to repairing or replacing any part or parts which are returned, prepaid, and are found to be defective by Buyers Products Co. Authorization from Buyers Products Co. must be obtained before returning any part. No charges for transportation or labor performed on Buyers' products will be allowed under this warranty.