


200 SERIES PUMPS - 207V/M58

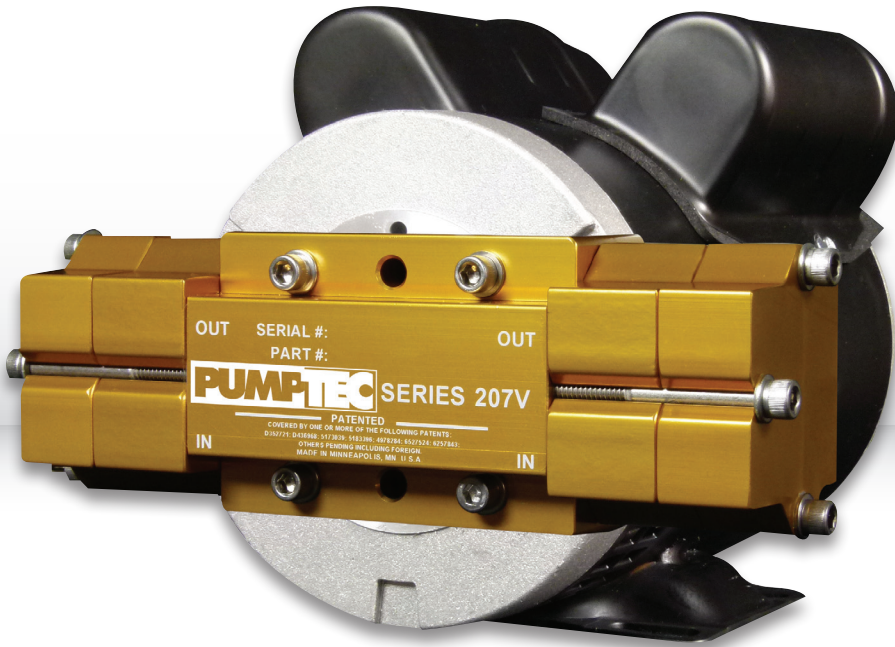

SPECIFICATIONS


- Max Pressure (psi)** 800
- Open Flow (gpm)** 1.6
- Seals** V-Rings
- O-Rings** Buna
- Inlet Ports (2)** - 3/8" NPT (F)
- Discharge Ports (2)** - 3/8" NPT (F)
- Max Fluid Temp (°F)** 140
- Voltage** Dual 120/230VAC 50/60Hz

MATERIALS

- Body** Anodized Aluminum
- Plunger** Stainless Steel
- Valves** Stainless Steel
- Fasteners** Stainless Steel

EXAMPLE

| CAM | AMPS | PSI | GPM |
|------|------|-----|------|
| .125 | 4.34 | 500 | 1.10 |

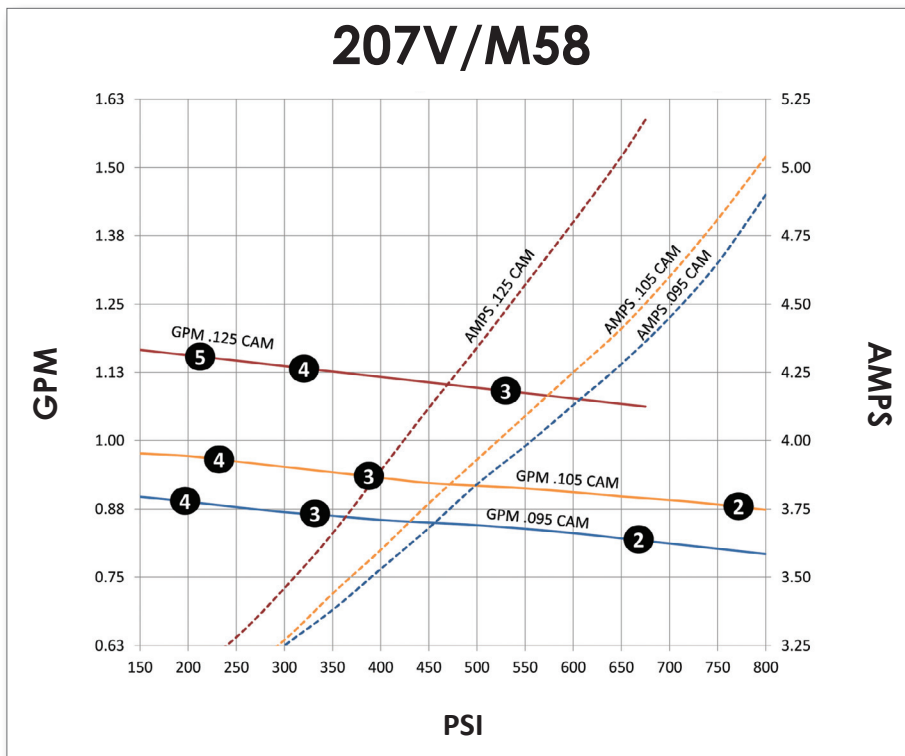

230V CHART CAN BE FOUND @ WWW.PUMPTec.COM

Data recorded pumping water at room temperature and 115V AC power. Actual performance will vary with voltage, application, and mfg tolerances. Copyright PumpTec, Inc. 2014

- Spraying Systems Co. nozzle sizes
- * Standard cams shown, more cams available upon request

