

200 SERIES - 207V/M9253F



SPECIFICATIONS

- Max Pressure (psi)** 800
- Open Flow (gpm)** 2.1
- Seals** V-Rings
- O-Rings** Buna
- Inlet Ports (2)** - 3/8" NPT (F)
- Discharge Ports (2)** - 3/8" NPT (F)
- Max Fluid Temp (°F)** 140
- Voltage** 120VAC


MATERIALS

- Body** Anodized Aluminum
- Plunger** Stainless Steel
- Valves** Stainless Steel
- Fasteners** Stainless Steel

*External Rectifiers sold separately

EXAMPLE

| CAM | AMPS | PSI | GPM |
|------|------|-----|-----|
| .085 | 1.31 | 450 | .78 |

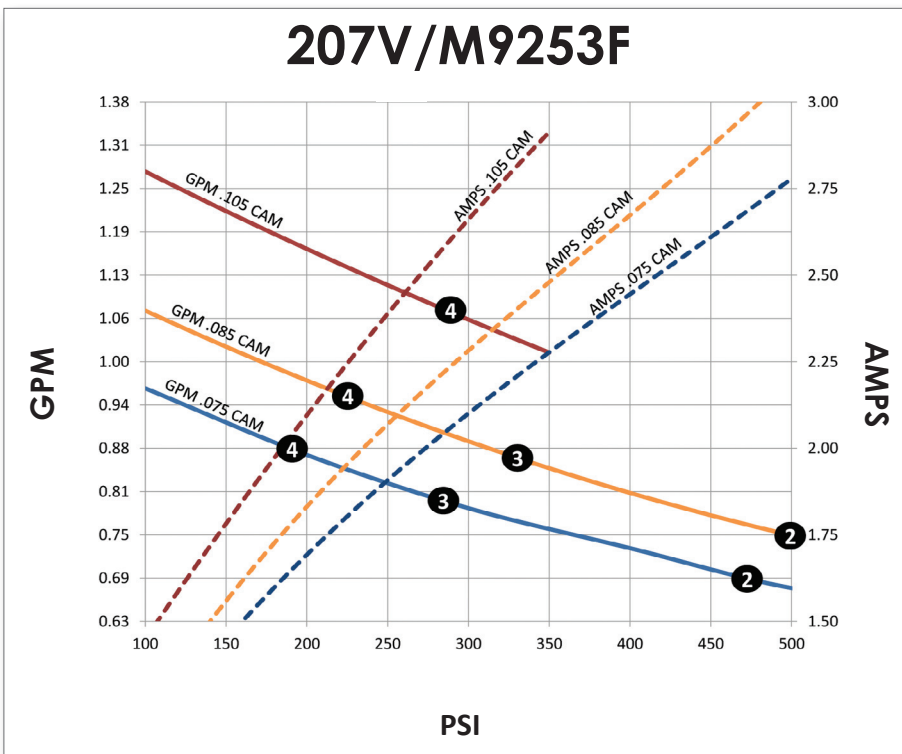

AVAILABLE IN 230VAC OPTION

Data recorded pumping water at room temperature and 115V AC power. Actual performance will vary with voltage, application, and mfg tolerances. Copyright Pumptec, Inc. 2014

- Spraying Systems Co. nozzle sizes
- * Standard cams shown, more cams available upon request

